

twilight

INSTRUMENTOS DE MEDICIÓN INDUSTRIAL

Ficha Técnica
**Contador de
partículas Portátil,
Particle Plus .**

www.twilight.mx

 / [twightsadecv](https://www.facebook.com/twightsadecv)

 / [twightsadecv](https://twitter.com/twightsadecv)

 / [twightsadecv](https://www.youtube.com/twightsadecv)

8306 Handheld Airborne Particle Counter

- Industry's highest concentration of 15,000,000 particles/ft³ @ 10% coincidence loss
- Ideal for use in Cleanrooms, Industrial Health & Safety and Air Quality applications
- >10 hours continuous operation on a fully charged battery
- Industry's first Sleep Mode and Power Conservation Mode with intelligent battery
- The most comprehensive internal self-diagnostics of any handheld particle counter
- Real-Time Meter detects particle contamination sources with visual and audible indication
- Internet of Things (IoT) communication allows for network or cloud-based data options




The Particles Plus 8306 Handheld Particle Counter measures 0.3 to 25.0 μm with a flow rate of 0.1 CFM (2.83 LPM). Easy to configure, this instrument displays up to 6 user-selectable size channels as well as temperature and relative humidity. View data and generate ISO 14644-1, EU GMP Annex 1 or FS 209E reports on screen or via printer, USB key, real time through its versatile output options or export to Particles Plus data-download software. Particles Plus counters can be controlled and monitored remotely via web browser. The 8306 mass concentration mode approximates density in $\mu\text{g}/\text{m}^3$ and allows for density and refractive index corrections to ensure accuracy.


All Particles Plus counters meet ISO 21501-4 and JIS B9921. The 8306 ensures compliance with an on-board pulse height analyzer.

Features and Benefits

- Measures 0.3 to 25.0 μm
- 0.1 CFM (2.83 LPM) flow rate
- Long life laser diode technology
- Measures up to 6 channels of simultaneous data
- Approximates mass concentration in $\mu\text{g}/\text{m}^3$ with density and refractive index corrections
- Integrated handle for one-handed operation
- Large easy-to-use icon driven color touch screen display
- Temperature and relative humidity probe included
- Stores up to 45,000 sample records, 1,000 sample locations and 50 recipes
- Annotation function allows user to save 32 character notations to a sample record
- Remote diagnostics allows for remote service investigation through the Internet
- Easy configuration and transferable from instrument to instrument
- Connect using Ethernet, USB or (optional) Wireless 802.11 b/g, RS 485 or RS232
- Displays and externally prints reports for ISO 14644-1, EU GMP Annex 1 & FS 209E
- Internal audible alarm with comprehensive alarm management
- User-definable reports including ISO-14644, EU GMP Annex 1, & FS 209E
- User-selectable channel sizes
- Complies with ISO 21501-4 and JIS B9921 standards
- Easy to clean and wipe down with minimal particle traps
- Seamless integration into a facility monitoring system
- Lightweight high-impact injection molded plastic enclosure
- 2 year warranty. Extended warranties available.

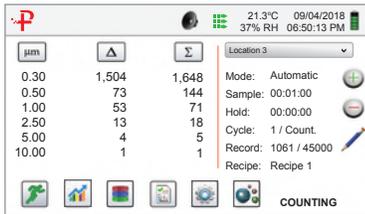


4.3" Color Touch Screen

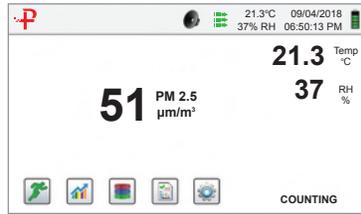


Configurable Environmental Sensor Display



Icon Driven Menus for Ease-of-Use

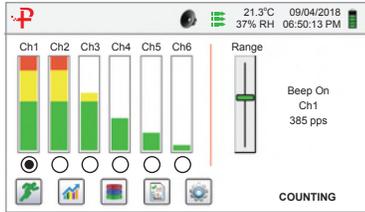

Real-Time Meter Pinpoints Particle Sources

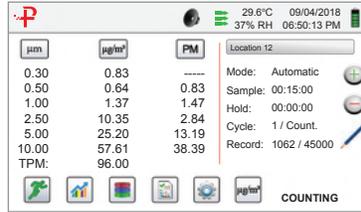

Simultaneous Display of Multiple PM Sizes



Control, & Manage from a Remote Device

Specifications

Model	8306
Size Range	0.3 to 25.0 µm
Size Channels	Factory calibrated at 0.3, 0.5, 1.0, 2.5, 5.0, 10.0 µm variable binning
Flow rate	0.1 CFM (2.83 LPM)
Concentration Limit	15,000,000 Particles/ft³ @ 10% coincidence loss
Battery Run Time	>10 hours continuous operation
Light Source	Long life laser diode
Counting Efficiency	50% @ 0.3 µm; 100% for particles >0.45 µm per JIS
Zero Count	<1 count / 5 minutes (<2 particles/ft³) (per ISO 21501-4 & JIS)
Count Modes	Real-Time Meter & graph, cumulative/differential count/m³ & count/ft³, and mass concentration (PM)
Count Alarms	1 to 9,999,999 counts
Calibration	NIST traceable
Display	4.3" (10.9 cm) WQVGA (480x272) color touch screen
Printer (Optional)	External thermal printer.
Vacuum Source	Internal pump with automatic flow control
Filtered Exhaust	Internal HEPA filter
Number of Channels	6
Custom Size Channels	Calibration for custom size channels available
Audible Alarm	Adjustable built-in alarm
Battery	Removable Li-ion
Battery Recharge Time	4 hours within instrument (<2 hours with external battery charger)
Reports	ISO 14644-1, EU GMP Annex 1, FS 209E
Recipes	50 user-configurable recipes
Communication Modes	Ethernet and USB
Optional Communication Mode	Wireless 802.11 b/g, RS485 or RS232
Environmental Sensor	Includes temperature and relative humidity probe 32° to 122°F (0° to 50°C) ±1°F (0.5°C), 15-90% ±2% relative humidity
Alarm	Alarms on counts for all particle sizes, low battery, sensor failure, environmental sensors and flow
Standards	ISO 21501-4 and JIS B9921
Calibration	Recommended minimum once per year
External Surface	High impact injection molded plastic
Dimensions (L x W x H)	10" x 5" x 4.5" (25.4 cm x 12.9 cm x 11.4 cm) includes handle and does not include probes
Weight	2.2 lb (1.0 kg)
Accessories	Operating manual and IMS software on USB flash drive, isokinetic probe, temperature relative humidity sensor, purge filter, battery, data download software, USB cable, power supply & cable
Optional Accessories	Printed manual, carrying case, spare battery, external battery charger, external printer and isokinetic probes, IMS-RT monitoring system
Buffer Memory	45,000 sample records (rotating buffer) including particle count data, environmental data, locations and times. Scrollable on screen or printout
Sample Locations	Up to 1,000 locations 20 characters long
Sample Time	1 second to 99 hours
Power	110 to 240 VAC 50/60 Hz universal in-line power supply
Operating Conditions	41° to 104°F (5° to 40°C) / 20% to 95% non-condensing
Storage Conditions	32° to 122°F (0° to 50°C) / Up to 98% non-condensing
Warranty	2 Years. Extended warranties available.

Patents US 9,140,638, US 9,140,639, US 9,157,847, US 9,158,652, US 9,677,990. Additional Patents Pending.

Particles Plus, Inc. reserves the right to change specifications without notice.
 Contact hello@particlesplus.com or your local distributor for more details.
 Particles Plus and the Particles Plus logo are trademarks of Particles Plus, Inc.
 ©2018 Particles Plus, Inc. All rights reserved.

twilight

INSTRUMENTOS DE MEDICIÓN INDUSTRIAL



LLÁMANOS

+52(81) 8115-1400 / +52 (81) 8173-4300

LADA Sin Costo:
01 800 087 43 75

E-mail:
ventas@twilight.mx

www.twilight.mx



/ **twilightsadecv**



/ **twilightsadecv**



/ **twilightsadecv**